


Fluke PAC 91 Printer Adapter Cable

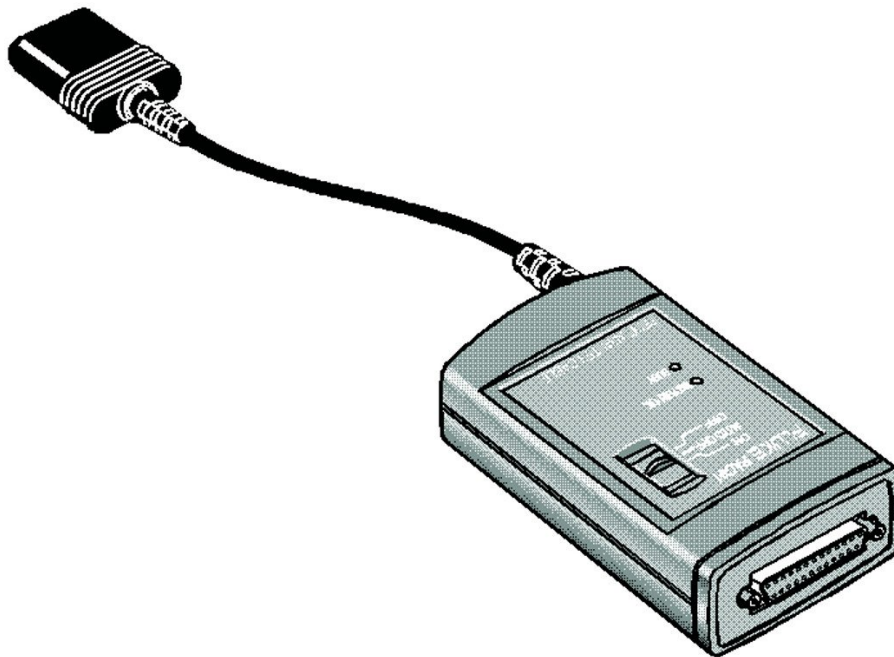

Key features

- Easy connection: Optical connector hooks directly to Fluke test tools with an optical interface
- Standard, 25-pin connector for Centronics printer cable
- Battery-powered for field use
- Auto Power-off mode helps conserve batteries
- "Busy" and "Power" indicator LED's
- 9600 baud communication speed keeps up with fast printers

Product overview: Fluke PAC 91 Printer Adapter Cable


- Connects optical output of a Fluke test tool to a widely used parallel printer interface
- The PAC91 converter has an optical RS-232 (serial) input and a parallel data (Centronics) output

Specifications: Fluke PAC 91 Printer Adapter Cable

General Specifications	
Optical input	Optical RS-232, 9600 baud, 8 bits, no parity, 1 stop bit, Xon/Xoff handshake
Output	Centronics (TTL levels,), 8 bit parallel with handshake. DB-25 female connector
Battery	Alkaline 9 V, IEC 6LR61 (NEDA 1604). Battery lifetime > 20 hrs at room temperature

Power switch seing	Off / Auto off / On. 'Auto off' mode gives auto power-down 5 minutes after last data transfer
Dimensions	123 x 76 x 30 mm (4.85 x 3 x 1.2 in); cable length: 30 cm (1 ft)
Environmental	Temperature range 0°C to +50°C (operating), -40°C to +70°C (storage)
Warranty	1 year
Supported instruments	ScopeMeter test tools, power harmonics analyzers and graphical multimeters

Ordering information

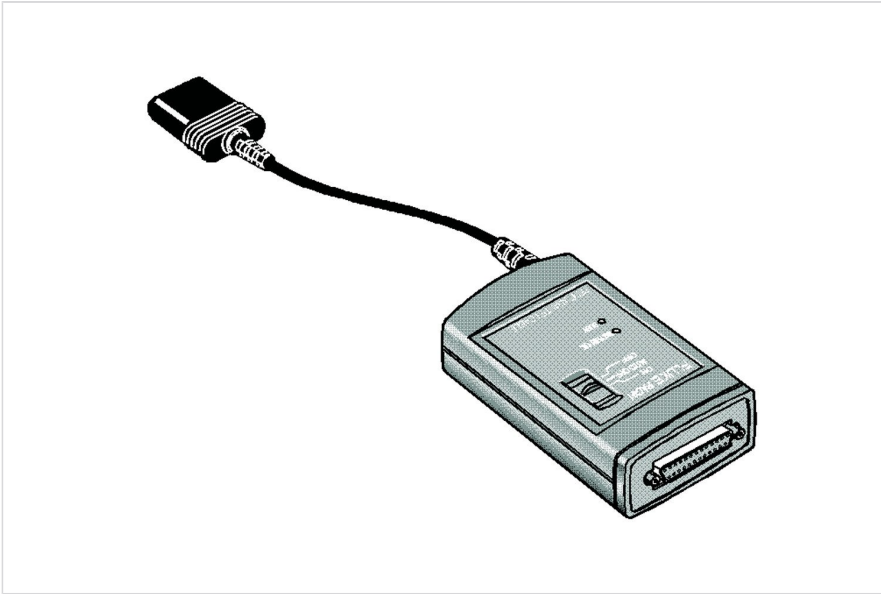

Fluke PAC91

PAC 91 Printer Adapter Cable

Fluke PAC 91 Printer Adapter Cable



Fluke. *Keeping your world up and running.®*

Fluke (UK) Ltd.
52 Hurricane Way
Norwich, Norfolk
NR6 6JB
United Kingdom
Tel.: +44 (0)20 7942 0708
E-mail: cs.uk@fluke.com
www.fluke.com/en-gb

©2025 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
04/2025

**Modification of this document is not permitted
without written permission from Fluke
Corporation.**