

## TECHNICAL DATA

# Fluke 700PTP-1 Pneumatic Test Pump



## Key features

- Pump can be easily cleaned without disassembly
- The vernier can be used as a stand-alone low pressure calibration source
- Two pressure ports allowing simultaneous connection:
  - 1/4 in NPT female fitting for the reference gauge or pressure module
  - 1/8 F-NPT female fitting for the unit under test
- Adjustable stroke length can be set to limit the pressure per stroke
- Vacuum range from -12.7 psi or -.87 bar, pressure range up to 600 psi or 41 bar

## Product overview: Fluke 700PTP-1 Pneumatic Test Pump


The Fluke-700PTP-1 pneumatic test pump is capable of supplying pressures up to 600 psi, 40 bar.

For use with 700 series pressure modules or test gauges. Can be directly connected to the reference port consolidating two separate pieces when performing pressure calibration and testing. Can also be used with 717 pressure calibrators. Ideal for calibrating pressure transmitters, pressure switches and pressure gauges up to 600 PSI/40 bar.

## Specifications: Fluke 700PTP-1 Pneumatic Test Pump

Mechanical and General Specifications	
Size (L x W x D)	8.7 x 4.8 x 3.5 in (220 x 122 x 89 mm)
Weight	1.03 lb (467 g)
Warranty	One year
Material	Weed materials: aluminum, silicon, neoprene, stainless steel, Buna-N

## Ordering information

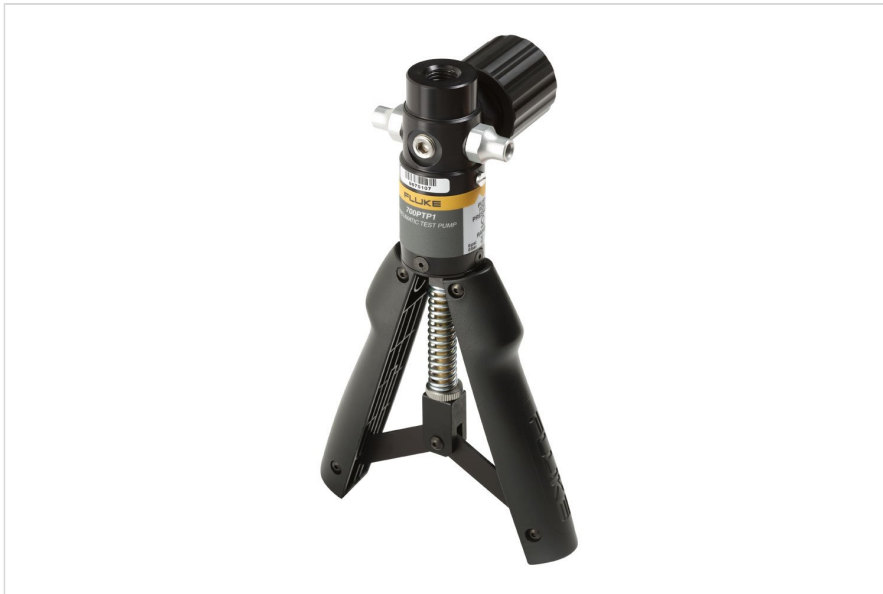

### Fluke 700PTP-1

Pneumatic Test Pump

- 
- ¼ in NPT male to ¼ in BSP female
  - 1 meter of hose
  - (2) ½ in NPT male quick connects
  - ½ in NPT female to ¼ in BSP female
  - Seal Kit
  - Instruction sheet
-

**Fluke.** *Keeping your world up and running.®*

**Fluke Corporation**

PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**

In the U.S.A. (800) 443-5853

In Canada (800) 36-FLUKE

From other countries +1 (425) 446-5500

[www.fluke.com](http://www.fluke.com)

©2025 Fluke Corporation.

Specifications subject to change without notice.

03/2025

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**