

TECHNICAL DATA

Fluke 700PA6 Absolute Pressure Module



Key features

- Rugged urethane molded case protects the module from rough handling and harsh conditions
- Features internal temperature compensation from 0 °C to 50 °C for full-accuracy performance
- Includes NIST-traceable calibration certificate
- Module can be calibrated locally using the Fluke 700PCK Pressure Calibration Kit, a PC, and a precision pressure source
- One year warranty

Product overview: Fluke 700PA6 Absolute Pressure Module

Display pressure readings in any of 10 different pressure units you specify in the calibrator setup

Specifications: Fluke 700PA6 Absolute Pressure Module

Specifications	
Range	100 psi / 690 kPa
Resolution	0.01 / 0.07
Reference Uncertainty (23 ± 3°C)	0.050%




Total ¹ Uncertainty 1 year	0.070
High Side Media ²	316 SS
Low Side Media ²	N/A

- 1. Total uncertainty, one year for temperature range 0°C to +50°C. Total uncertainty, 1.0% of full span for temperature range -10°C to 0°C. Compensated temperature range is 15°C to 35°C.
- 2. "Dry" indicates dry air or non-corrosive gas as compatible media. "316 SS" indicates media compatible with Type 316 Stainless Steel. "C276" indicates media compatible with Hastelloy C276.



Ordering information

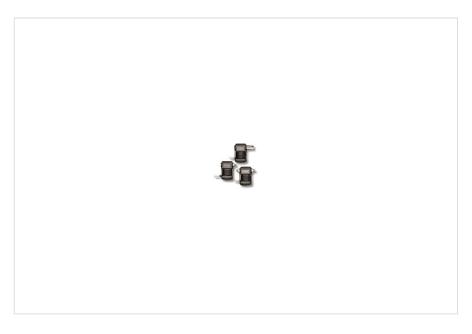

Fluke 700PA6

Absolute Pressure Module

Fluke 700PA6 Absolute Pressure Module



Fluke. Keeping your world up and running.®

Fluke (UK) Ltd.
52 Hurricane Way
Norwich, Norfolk
NR6 6JB
United Kingdom
Tel.: +44 (0)20 7942 0708
E-mail: cs.uk@fluke.com
www.fluke.com/en-gb

©2025 Fluke Corporation. All rights reserved. Data subject to alteration without notice. 04/2025

Modification of this document is not permitted without written permission from Fluke Corporation.