

TECHNICAL DATA

Fluke 2600A-101 Sprt Probe



Key features

- The 2600A-101 is a precision four-wire, 100 Ohm SPRT (Secondary Platinum Resistance Thermometer) probe that have been designed and tested to meet the precision required as a secondary reference standard.

Product overview: Fluke 2600A-101 Sprt Probe



Secondary Platinum Resistance Thermometer Probe

The 2600A-101 is a precision four-wire, 100 Ohm SPRT (Secondary Platinum Resistance Thermometer) probe that have been designed and tested to meet the precision required as a secondary reference standard. The 2600A-101 has stripped leads suitable for connection to any Fluke data acquisition product or other screw terminal connector. This probe comes with calibration certificates and data for -200 to 6600°C.

Probe hook up diagram:

The probe connects to channel 1(input) and 11(excitation) on the Hydra input connector.

Channel	Terminal
Ch #11	H Red L White
Ch #1	Red White

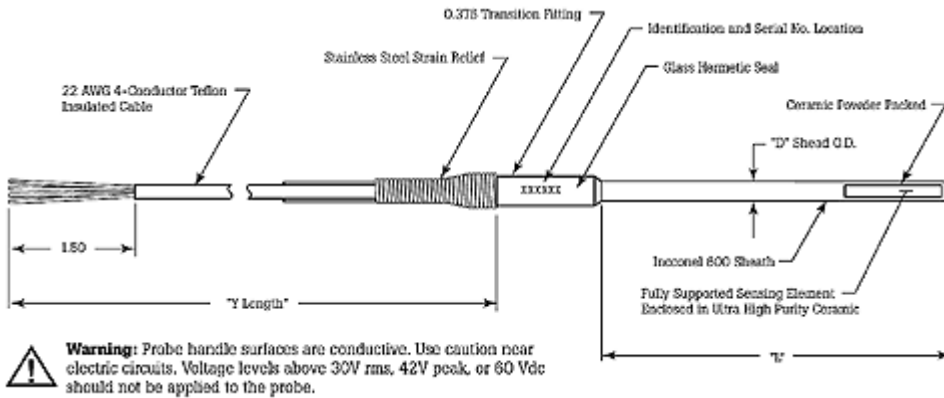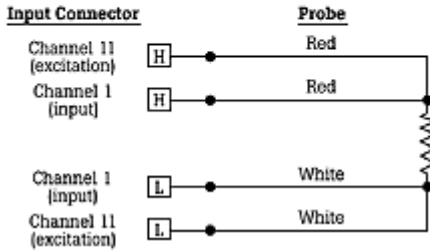

Warning: Probe handle surfaces are conductive. Use caution near electric circuits. Voltage levels above 30V rms, 42 V peak, or 60 V dc should not be applied to the probe.

Specifications: Fluke 2600A-101 Sprt Probe

General Specifications													
Use Temperature	200 °C to 660 °C												
Stability	Typical draft < 0.01°C after 100 times from 25 to 660 °C												
Calibrated Accuracy	<table border="1"> <thead> <tr> <th>Temperature</th> <th>Uncertainty</th> </tr> </thead> <tbody> <tr> <td>- 183°C</td> <td>+/- 0.01°C</td> </tr> <tr> <td>0°C</td> <td>+/- 0.007°C</td> </tr> <tr> <td>200°C</td> <td>+/- 0.024°C</td> </tr> <tr> <td>75%°C</td> <td>+/- 0.033°C</td> </tr> <tr> <td>660 °C</td> <td>+/- 0.050 °C</td> </tr> </tbody> </table>	Temperature	Uncertainty	- 183°C	+/- 0.01°C	0°C	+/- 0.007°C	200°C	+/- 0.024°C	75%°C	+/- 0.033°C	660 °C	+/- 0.050 °C
	Temperature	Uncertainty											
	- 183°C	+/- 0.01°C											
	0°C	+/- 0.007°C											
	200°C	+/- 0.024°C											
	75%°C	+/- 0.033°C											
660 °C	+/- 0.050 °C												

Performance Specifications (nominal)	Ice point resistance:	100 Ω \pm 0.1 Ω
	Alpha value:	0.00385 \pm 0.00001 Ω / Ω /C
	Insulation resistance:	1000 Meg Ω at 100 Vdc at 20°C
		100 Meg Ohms at 100 Vdc at 400°C
	Hysteresis:	0.01°C Max. using 0, 400°C as the end points
	Self heating:	0.02°C / mw in well stirred bath
	Thermoelectric voltage:	When tested in an ice bath, with immersion depth from 4 to 10 inches (10 to 25 cm), thermo-electric voltage will not exceed 2 μ V
	Time constant:	9 seconds typical for 63.2% response to step change
	Long term stability:	Stability at 0°C after exposure to upper temperature limits
Dimensions	Sheath diameter (D):	.25 inches (6.3 mm)
	Length (L):	12 inches (0.3 m)
	Cable length (Y):	6 feet (1.83 m)
	Wire:	22 AWG, PTFE jacketed, rated to 200 C
	Wire terminations:	flying lead; stripped / tinned

Ordering information



2600A-101

SPRT Probe

Fluke. *Keeping your world up and running.®*

Fluke (UK) Ltd.
52 Hurricane Way
Norwich, Norfolk
NR6 6JB
United Kingdom
Tel.: +44 (0)20 7942 0708
E-mail: cs.uk@fluke.com
www.fluke.com/en-gb

©2025 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
03/2025

**Modification of this document is not permitted
without written permission from Fluke
Corporation.**