

TECHNICAL DATA

Fluke Ti95 Infrared Camera





Key features


- The only wireless industrial infrared camera in its price class¹ – take advantage of the benefits of Fluke Connect® by seamlessly gathering and sharing inspection results instantly
- Superior image quality, up to 84% better spatial resolution than other competitive models in this price class¹
- 80 x 80 resolution
- Removable 4GB SD memory card
- 8 GB Fluke Connect® wireless SD Card
- Find potential problems faster and easier with IR-Fusion® picture-in-picture mode
- 2 megapixel built-in digital camera
- 3.5 inch LCD
- Smart Battery System - Lithium ion smart battery pack with five-segment LED display to show charge level
- Rugged, lightweight, point-and-shoot infrared camera

¹ Class is defined as an industrial handheld infrared camera in the same price range based on MSRP as of May 1, 2014.

Product overview: Fluke Ti95 Infrared Camera

BETTER detail, BIGGEST display, BEST VALUE in their class¹

Images were captured under the same conditions and from the same distance of 1.2 m (4 ft) by a professional thermographer and exported in a JPEG format. Except for the captions in the lower, left-hand corner of each image, images are displayed as saved by each infrared camera.

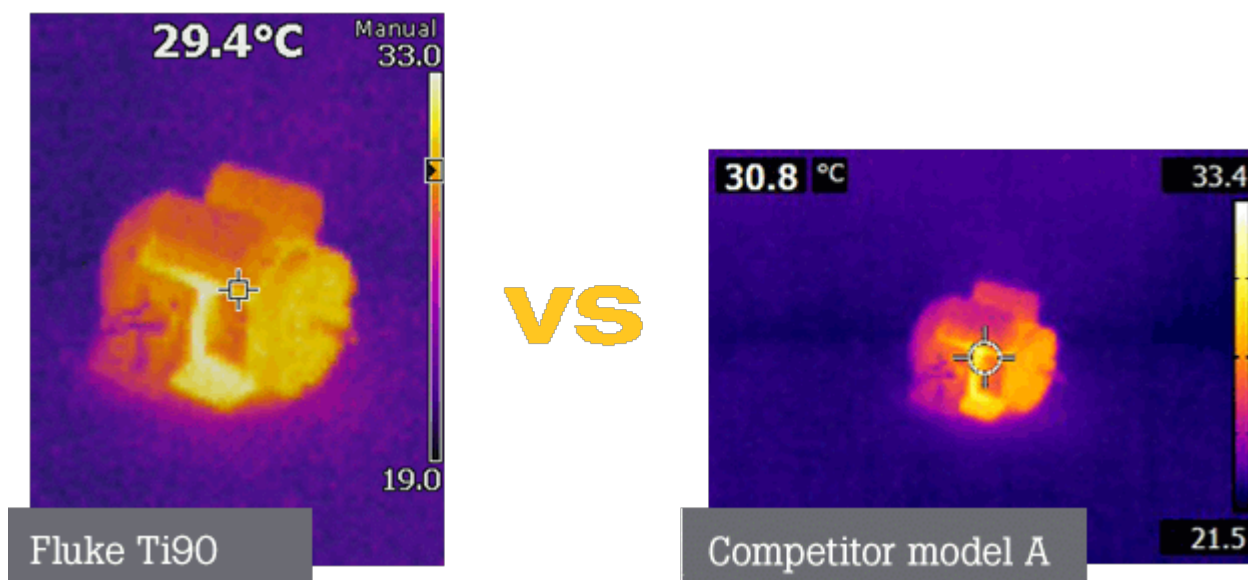

Features rich affordability at your fingertips with DIFFERENCES YOU CAN SEE.

- See more detail with 23% better spatial resolution¹ – increases the detail in your inspection target
- Easier to see potential problems with a 32% larger display¹



Prevent unexpected loss of power with pop in/pop out replaceable smart batteries with handy LED charge level indicator.



Easy image transfer and more flexibility with replaceable 12 GB of memory capacity (8 GB Fluke Connect® wireless card and 4 GB memory card.)



Fluke Connect® compatible - save and share measurements faster and easier from the field. ²

SmartView® software® is included with all Fluke infrared camera.

¹Compared to industrial handheld infrared cameras with list prices up to \$2,000.00 (USD) as of September 17, 2014.

²Within provider's wireless service area.

Specifications: Fluke Ti95 Infrared Camera

Key Features	
IFOV (spatial resolution)	5.6 mRad
Detector resolution	80x80 (6,400 pixels)
Field of view	26 °H x 26 °V
Minimum focus distance	46 cm (18 in)
Focus system	Focus free (fixed focus)
Wireless connectivity	Fluke Connect™ app compatible with included wireless SD Card ¹
IR-Fusion® technology	IR-Fusion® Picture-in-Picture (AutoBlend™ mode available in SmartView® software)
Display	3.5 inch diagonal (portrait format)
Design	Rugged, lightweight, ergonomic design for one-handed use

Thermal sensitivity (NETD)	□ 0.10 °C at 30 °C target temp (100 mK)
Temperature measurement range	-20 °C to +250 °C (-4 °F to +482 °F)
Built-in digital camera (visible light)	2 megapixel industrial performance
Frame rate	9 Hz
Data Storage and Image Capture	
Extensive memory options	Removable 4 Gb SD memory card and 8 Gb wireless SD card (where available); direct download via USB-to-PC connection
File formats image	Non-radiometric (.bmp) or (.jpeg) or fully-radiometric (.is2) No analysis software required for non-radiometric (.bmp, .jpg) files
SmartView® software	SmartView® software, Fluke Connect™ ¹ , and SmartView® Mobile App—full analysis and reporting software
Baery	
Baeries (field-replaceable, rechargeable)	One lithium ion smart baery pack with five-segment LED display to show charge level
AC baery charging system	In-imager charging. Optional two-bay baery charger or optional 12 V automotive charging adapter
Temperature Measurement	
Accuracy	± 2 °C or 2 % (at 25 °C nominal, whichever is greater)
On-screen emissivity correction	Yes (both value and table)
On-screen reflected background temperature compensation	Yes
General Specifications	
Color palettes	6 standard: Ironbow, Blue-Red, High-Coast, Amber, Hot Metal, Grayscale
Spot temp	Hot and cold spot markers
Center box	Fixed-size measurement box with MIN-MAX-AVG temp
Drop	Engineered to withstand 2 meter (6.5 feet) drop
Size (H x W x L)	28.4 cm x 8.6 cm x 13.5 cm (11.2 in x 3.4 in x 5.3 in)
Weight (baery included)	0.73 kg (1.6 lb)
Enclosure rating	IP54 (protected against dust, limited ingress; protection against water spray from all directions)
Warranty	Two-years (standard), extended warranties are available
Notes	
¹ Fluke Connect™ not available in all countries	

Ordering information



FLK-Ti95 9Hz

Fluke Ti95 Infrared Camera

Includes:

- Infrared camera
- AC power adapter
- Lithium ion smart battery (1)
- USB cable
- SD memory card
- Fluke Connect™ wireless SD Card (where available, shipped separately in non-European countries)
- Soft transport bag
- Adjustable hand strap (left- or right-handed use)
- Warranty registration card

Available for free download:

- SmartView® Analysis and Reporting Software »
- Manual »



Preventive maintenance simplified. Rework eliminated.

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect™ system.

- Eliminate data-entry errors by saving measurements directly from the tool and associating them with the work order, report or asset record.
- Maximize uptime and make confident maintenance decisions with data you can trust and trace.
- Access baseline, historical and current measurements by asset.
- Move away from clipboards, notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- Share your measurement data using ShareLive™ video calls and emails.

Find out more at flukeconnect.com



All trademarks are the property of their respective owners. WiFi or cellular service required to share data. Smartphone, wireless service and data plan not included with purchase. First 5 GB of storage is free. Phone support details can be viewed at fluke.com/phones.

Smart phone wireless service and data plan not included with purchase. Fluke Connect is not available in all countries.