

TECHNICAL DATA

Fluke 2600A-101 Sprt Probe



Key features

- The 2600A-101 is a precision four-wire, 100 Ohm SPRT (Secondary Platinum Resistance Thermometer) probe that have been designed and tested to meet the precision required as a secondary reference standard.

Product overview: Fluke 2600A-101 Sprt Probe


Secondary Platinum Resistance Thermometer Probe

The 2600A-101 is a precision four-wire, 100 Ohm SPRT (Secondary Platinum Resistance Thermometer) probe that have been designed and tested to meet the precision required as a secondary reference standard. The 2600A-101 has stripped leads suitable for connection to any Fluke data acquisition product or other screw terminal connector. This probe comes with calibration certificates and data for -200 to 6600°C.

Probe hook up diagram:

The probe connects to channel 1(input) and 11(excitation) on the Hydra input connector.

Channel	Terminal
Ch #11	H Red L White
Ch #1	Red White

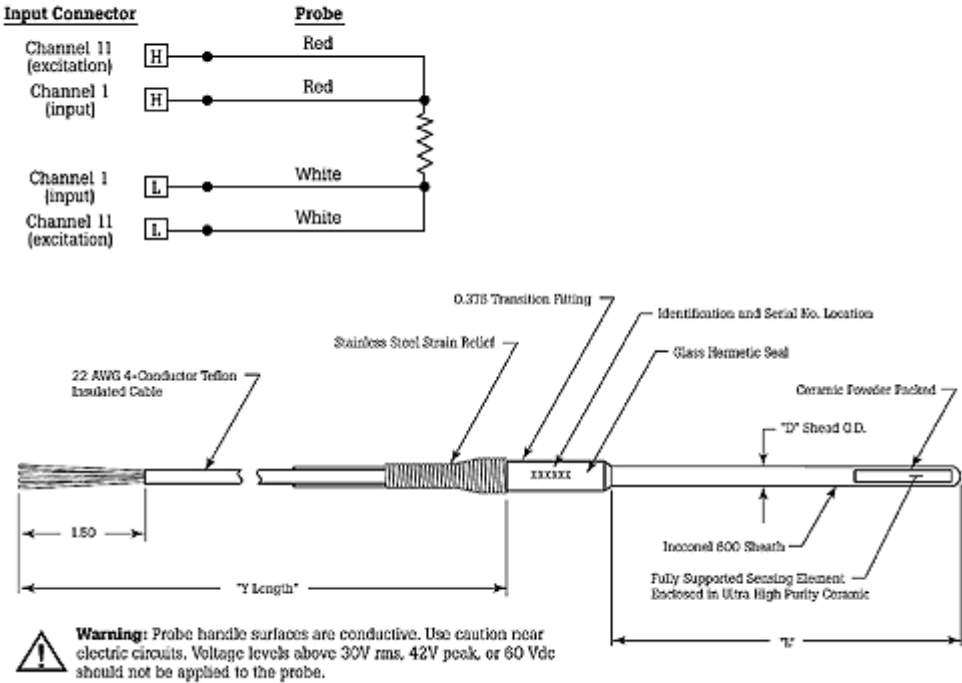

Warning: Probe handle surfaces are conductive. Use caution near electric circuits. Voltage levels above 30V rms, 42 V peak, or 60 V dc should not be applied to the probe.

Specifications: Fluke 2600A-101 Sprt Probe

General Specifications		
Use Temperature	200 °C to 660 °C	
Stability	Typical draft < 0.01°C after 100 times from 25 to 660 °C	
Calibrated Accuracy	Temperature	Uncertainty
	- 183°C	+/- 0.01°C
	0°C	+/- 0.007°C
	200°C	+/- 0.024°C
	75%°C	+/- 0.033°C
	660 °C	+/- 0.050 °C

Performance Specifications (nominal)	Ice point resistance:	100 $\Omega \pm 0.1 \Omega$
	Alpha value:	0.00385 \pm 0.00001 $\Omega / \Omega / ^\circ\text{C}$
	Insulation resistance:	1000 Meg Ω at 100 Vdc at 20 $^\circ\text{C}$
		100 Meg Ohms at 100 Vdc at 400 $^\circ\text{C}$
	Hysteresis:	0.01 $^\circ\text{C}$ Max. using 0, 400 $^\circ\text{C}$ as the end points
	Self heating:	0.02 $^\circ\text{C}$ / mw in well stirred bath
	Thermoelectric voltage:	When tested in an ice bath, with immersion depth from 4 to 10 inches (10 to 25 cm), thermo-electric voltage will not exceed 2 μV
	Time constant:	9 seconds typical for 63.2% response to step change
	Long term stability:	Stability at 0 $^\circ\text{C}$ after exposure to upper temperature limits
Dimensions	Sheath diameter (D):	.25 inches (6.3 mm)
	Length (L):	12 inches (0.3 m)
	Cable length (Y):	6 feet (1.83 m)
	Wire:	22 AWG, PTFE jacketed, rated to 200 C
	Wire terminations:	flying lead; stripped / tinned

Ordering information



2600A-101

SPRT Probe

Fluke. *Keeping your world up and running.®*

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

BUT. FLUKE SOUTH EAST ASIA PTE LTD

Menera Satu Sentra Kelapa Gading #06-05

Jl. Bulevar Kelapa Gading Kav. LA# No. 1

Summarecon Kelapa Gading

Jakarta Utara 14240

Indonesia

Tel: +62 21 2938 5922

Email: info.asean@fluke.com

www.fluke.com/id-en

©2025 Fluke Corporation. Specifications subject to change without notice.

04/2025

Modification of this document is not permitted without written permission from Fluke Corporation.