


TECHNICAL DATA

1586-2588-KIT/C | DAQ-STAQ Multiplexer, Adapter Card, Interface Cable, Accredited Calibration






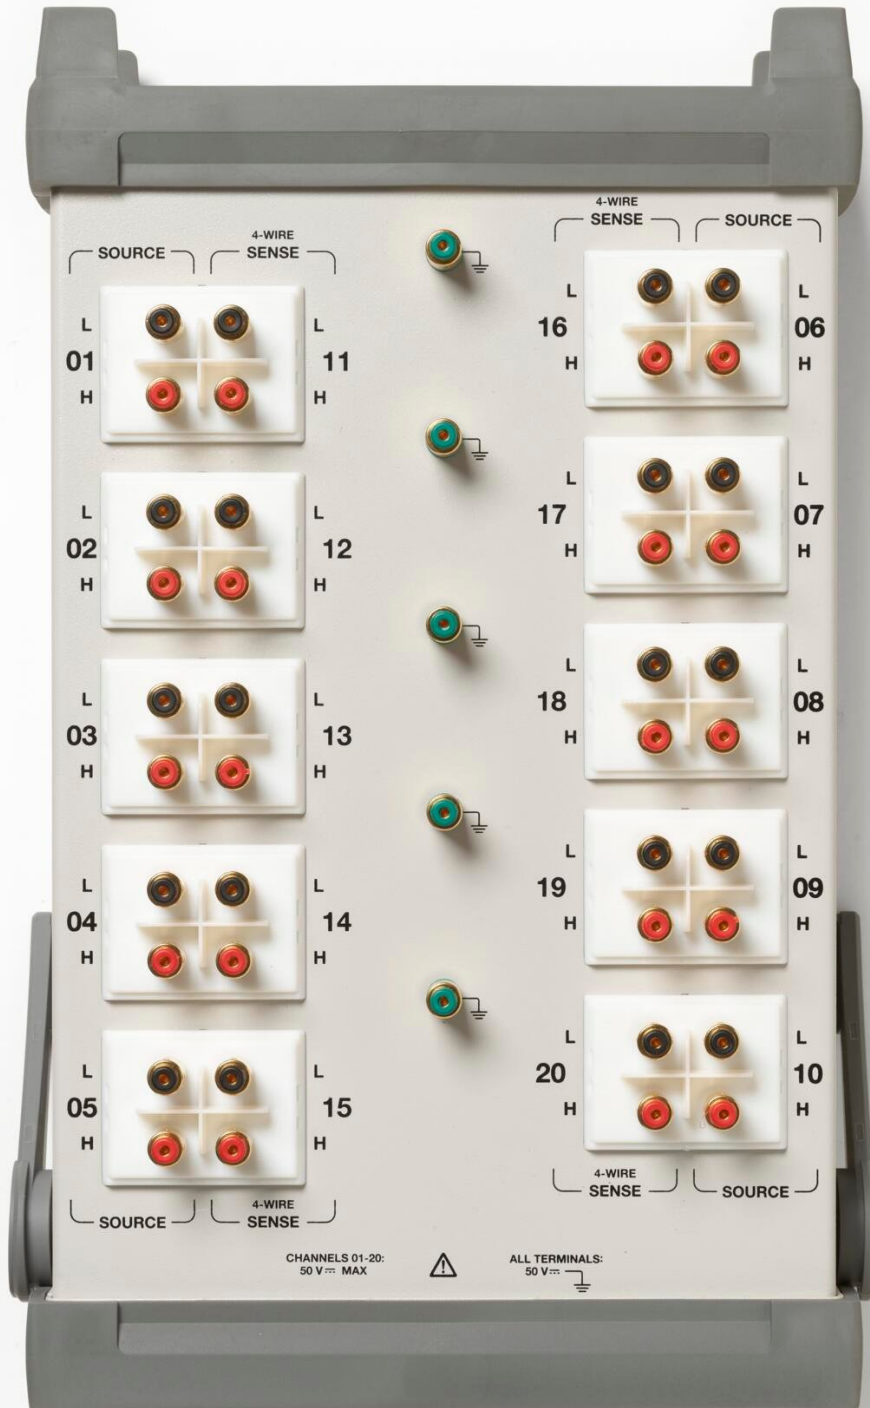





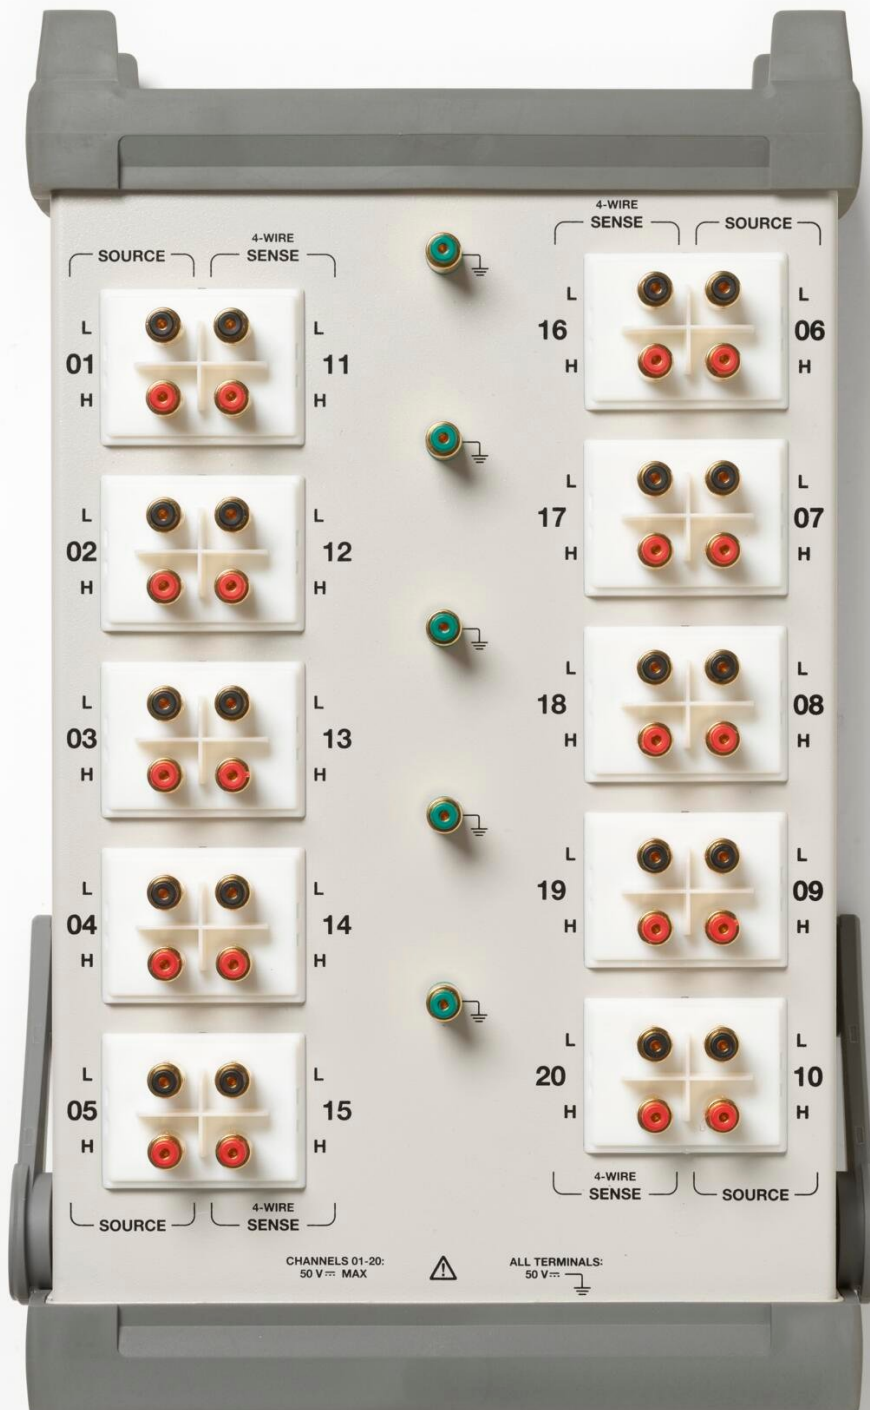



Product overview: 1586-2588-KIT/C | DAQ-STAQ Multiplexer, Adapter Card, Interface Cable, Accredited Calibration

The kit contains everything you need to connect a DAQ-STAQ multiplexer to your 1586A mainframe. The DAQ-STAQ is designed for high-accuracy measurements in secondary temperature calibration labs. Easily connect/disconnect thermocouples, PRTs and thermistors. There are twenty mini-jack thermocouple inputs and gold-plated PRT/thermistor connectors for up to 10 4-wire connections.

Includes:

- 1586-2588 DAQ-STAQ Multiplexer
- Adapter Card
- Interface Cable
- Accredited Calibration

Specifications: 1586-2588-KIT/C | DAQ-STAQ Multiplexer, Adapter Card, Interface Cable, Accredited Calibration

Specifications	
Maximum Input	50 V
Offset Voltage	<2 μ V
3-Wire Inteal Resistance Mismatch	<50 m Ω
Basic CJC Accuracy	0.25 $^{\circ}$ C

Ordering information



1586-2588-KIT/C

DAQ-STAQ Multiplexer, Adapter Card, Interface Cable, Accredited Calibration



Fluke. *Keeping your world up and running.®*

Fluke (UK) Ltd.
52 Hurricane Way
Norwich, Norfolk
NR6 6JB
United Kingdom
Tel.: +44 (0)20 7942 0708
E-mail: cs.uk@fluke.com
www.fluke.com

©2025 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
04/2025

**Modification of this document is not permitted
without written permission from Fluke
Corporation.**