

**TECHNICAL DATA** 

# Fluke 80PK-8 Pipe Clamp Temperature Probe



### **Key features**


- Durable ribbon sensor
- Measurement range: -29 to 149 °C for pipe diameters from 6.4 to 34.9 mm
- One year warranty

## Product overview: Fluke 80PK-8 Pipe Clamp Temperature Probe

The Fluke 80PK-8 Pipe Clamp Temperature Probe uses Type-K thermocouple for fast temperature and superheat measurements of pipe surfaces. The 80PK-8 Type K Thermocouple Pipe Clamp Temperature Probe is designed to reliably measure the temperature of pipes ¼-inch (6 mm) to 1 3/8-inch (35 mm) in diameter, at temperatures between -29 °C and 149 °C (-20 °F and 300 °F), while retaining a long service life.



## **Ordering information**

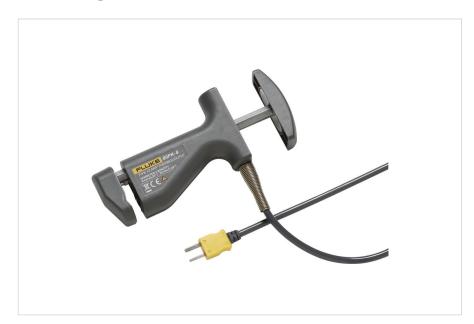

#### 80PK-8

Fluke 80PK-8 Pipe Clamp Temperature Probe

Pipe Clamp Temperature Probe






#### Preventive maintenance simplified. Rework eliminated.

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect™ system.

- Eliminate data-entry errors by saving measurements directly from the tool and associating them with the work order, report or asset record.
- Maximize uptime and make confident maintenance decisions with data you can trust and trace.
- Access baseline, historical and current measurements by asset.
- Move away from clipboards, notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- Share your measurement data using ShareLive<sup>™</sup> video calls and emails.

#### Find out more at **flukeconnect.com**



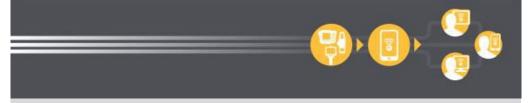

All trademarks are the property of their respective owners. WiFi or cellular service required to share data. Smartphone, wireless service and data plan not included with purchase. First 5 GB of storage is free. Phone support details can be viewed at **fluke.com/phones**.

Smart phone wireless service and data plan not included with purchase. Fluke Connect is not available in all countries.