


TECHNICAL DATA

Fluke STL120-III Shielded Test Leads Set

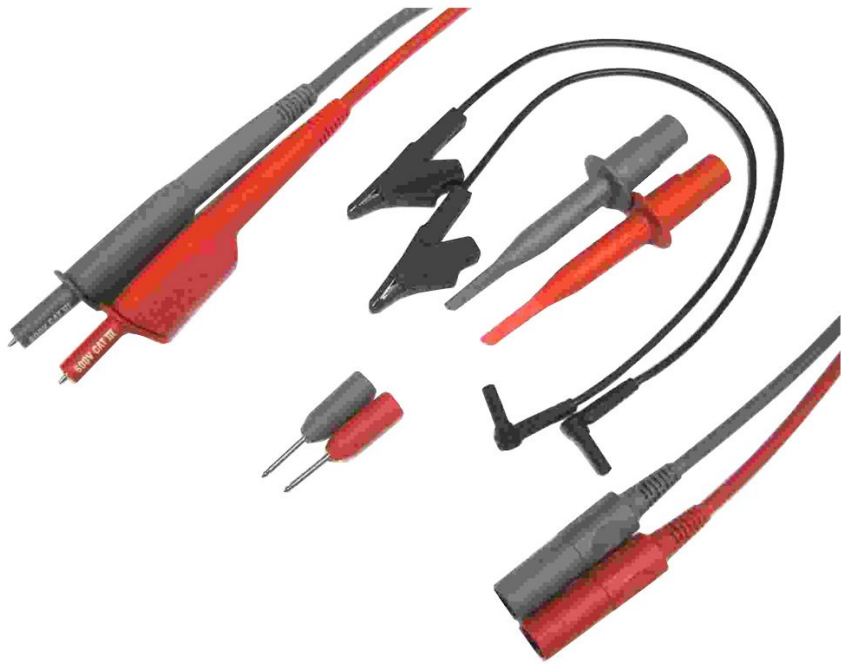

Product overview: Fluke STL120-III Shielded Test Leads Set

Set of two (one red, one gray) double insulated silicone shielded test leads for noise free measurements.

Specially designed for use with the Fluke ScopeMeter 120 Series. Compatible with AC120 Alligator Clips and HC120 Hook Clips. Safety designed ground leads included. Integral strain relieve and extra hard probe tips provide extra long service life. Features safety designed shrouded plugs and notched tip to prevent probe from sliding.

Specifications: Fluke STL120-III Shielded Test Leads Set

Specifications	
Bandwidth	12,5 MHz
Maximum signal voltage	600 V rms CAT III per IEC 61010-031:2008
Maximum voltage to ground	600 V rms CAT III per IEC 61010-031:2008
Maximum vcurrent	1 A
2 mm add-on testpin	600 V CAT II per IEC 61010-031:2008
Length	1.2 m (48)

Ordering information



Fluke STL120 III

Shielded Test Leads Set

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Europe/M-East/Africa
+31 (0)40 267 5100
In Canada (800)-36-FLUKE
From other countries +1 (425) 446-5500
www.fluke.com/en-th

©2025 Fluke Corporation. Specifications subject to
change without notice.
04/2025

**Modification of this document is not permitted
without written permission from Fluke
Corporation.**