


TECHNICAL DATA

3160-3 | Comparison Insert, 2 holes at 3.2 mm (1/8 in), 2 at 4.76 mm (3/16 in), 2 at 6.35 mm (1/4 in), 2 at 9 mm (9/32 in), and 2 at 9.5 mm (3/8 in)





Ordering information

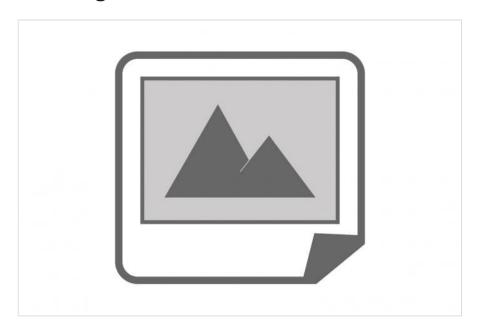

3160-3

Comparison Insert, 2 holes at 3.2 mm (1/8 in), 2 at 4.76 mm (3/16 in), 2 at 6.35 mm (1/4 in), 2 at 9 mm (9/32 in), and 2 at 9.5 mm (3/8 in)

² Fluke Corporation 3160-3 | Comparison Insert, 2 holes at 3.2 mm (1/8 in), 2 at 4.76 mm (3/16 in), 2 at 6.35 mm (1/4 in), 2 at 9 mm (9/32 in), and 2 at 9.5 mm (3/8 in)



Fluke. Keeping your world up and running.®

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands
www.fluke.com/en
©2025 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
03/2025

For more information call: In Middle East/Africa +31 (0)40 267 5100

Modification of this document is not permitted without written permission from Fluke Corporation.

³ Fluke Corporation 3160-3 | Comparison Insert, 2 holes at 3.2 mm (1/8 in), 2 at 4.76 mm (3/16 in), 2 at 6.35 mm (1/4 in), 2 at 9 mm (9/32 in), and 2 at 9.5 mm (3/8 in)