

**TECHNICAL DATA** 

# **Fluke TL1500DC Insulated Test Leads**









## **Key features**

- Measures voltage safely and accurately up to 1500 V DC
- CAT III 1500 V CAT IV 600 V with protective cap / CAT II 1500 V without protective cap, 10A
- Compatible with most Fluke clamp meters and multimeters
- Comes with one-year warranty
- 39.3 inches (1 meter) long

### Product overview: Fluke TL1500DC Insulated Test Leads

The Fluke TL1500DC test leads provide safe and accurate voltage measurements up to 1500 V DC, commonly found in solar, wind, and battery applications. These insulated test leads made of PVC material are safety rated CAT III 1500 V, CAT IV 600 V with the protective cap and CAT II 1500 V without protective cap for use in different environments.

# **Specifications: Fluke TL1500DC Insulated Test Leads**


Ratings:	IEC 61010-031 CAT II 1500 V, CAT III 1500 V, CAT IV 600 V, 10 A
Compatibility:	Compatible with all instruments that accept standard 4 mm shrouded banana plugs
Pollution:	Pollution Degree 2, 2000 m altitude
Environmental ratings:	Operating -10C to 50C



Storage:	-20 °C to 60 °C @ < 80 % RH
Storage.	20 0 0 0 0 0 0 0 0 0 0 0 0 0



# **Ordering information**

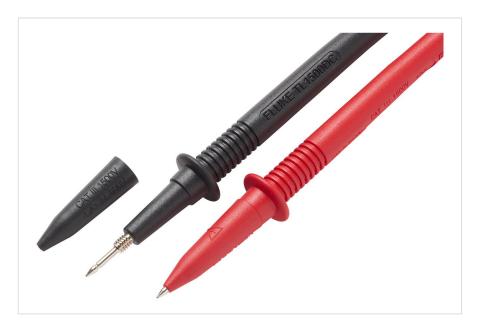

#### Fluke TL1500DC

Fluke TL1500DC Insulated Test Leads

#### Includes:

- One pair (red, black) TL1500DC Insulated Test Leads
- Two protective caps
- One-year warranty



#### Fluke. Keeping your world up and running.®

Fluke Europe B.V.
P.O. Box 1186
5602 BD Eindhoven
The Netherlands
www.fluke.com/en
©2025 Fluke Corporation. All rights reserved.
Data subject to alteration without notice.
03/2025

Modification of this document is not permitted without written permission from Fluke Corporation.

For more information call:

In Middle East/Africa

+31 (0)40 267 5100