


Fiche technique

## 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

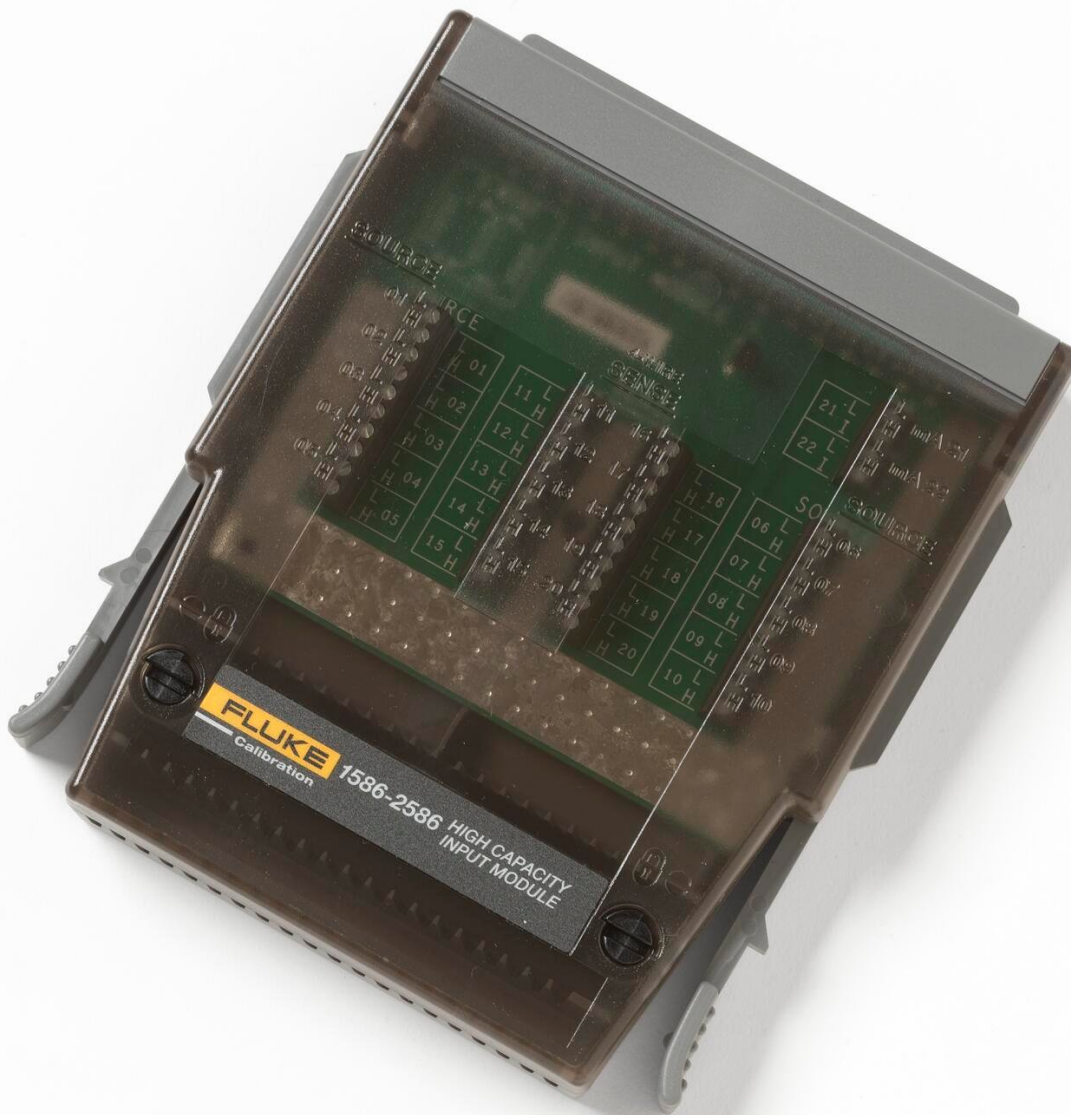

### Présentation du produit: 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

If you want to configure the 1586A yourself to work with the 1586-2586 High-Capacity Module, you will need a relay card. However, if you already have a slot in the back panel of the 1586A configured for use with the 1586-2586, then you don't need another relay card. You can simply slide the 1586-2586 High-Capacity Module into the preconfigured slot and begin taking measurements. The 1586-2586 High-Capacity Module is designed with universal input channels



to measure temperature, resistance, dc voltage, and dc current for data acquisition applications where channel count and scan speed are important.

## Spécifications: 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

Specifications	
Maximum Input	50 V
Offset Voltage	<2 $\mu$ V
3-Wire Inteal Resistance Mismatch	<50 m $\Omega$
Basic CJC Accuracy	0.6 $^{\circ}$ C

## Modèles



### **1586-2586/C**

High-Capacity Module without Relay Card, Accredited Calibration

---

*Soyez à la pointe du progrès avec Fluke.*

**Fluke France SAS**

20 Allée des érables  
93420 Villepinte  
France

Téléphone: +33 17 080 0000  
E-mail: [cs.fr@fluke.com](mailto:cs.fr@fluke.com)  
[www.fluke.com/fr-fr](http://www.fluke.com/fr-fr)

©2025 Fluke Corporation. Tous droits réservés.  
Informations modifiables sans préavis.  
04/2025

**La modification de ce document est interdite sans  
l'autorisation écrite de Fluke Corporation.**