


Data teknis

## 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

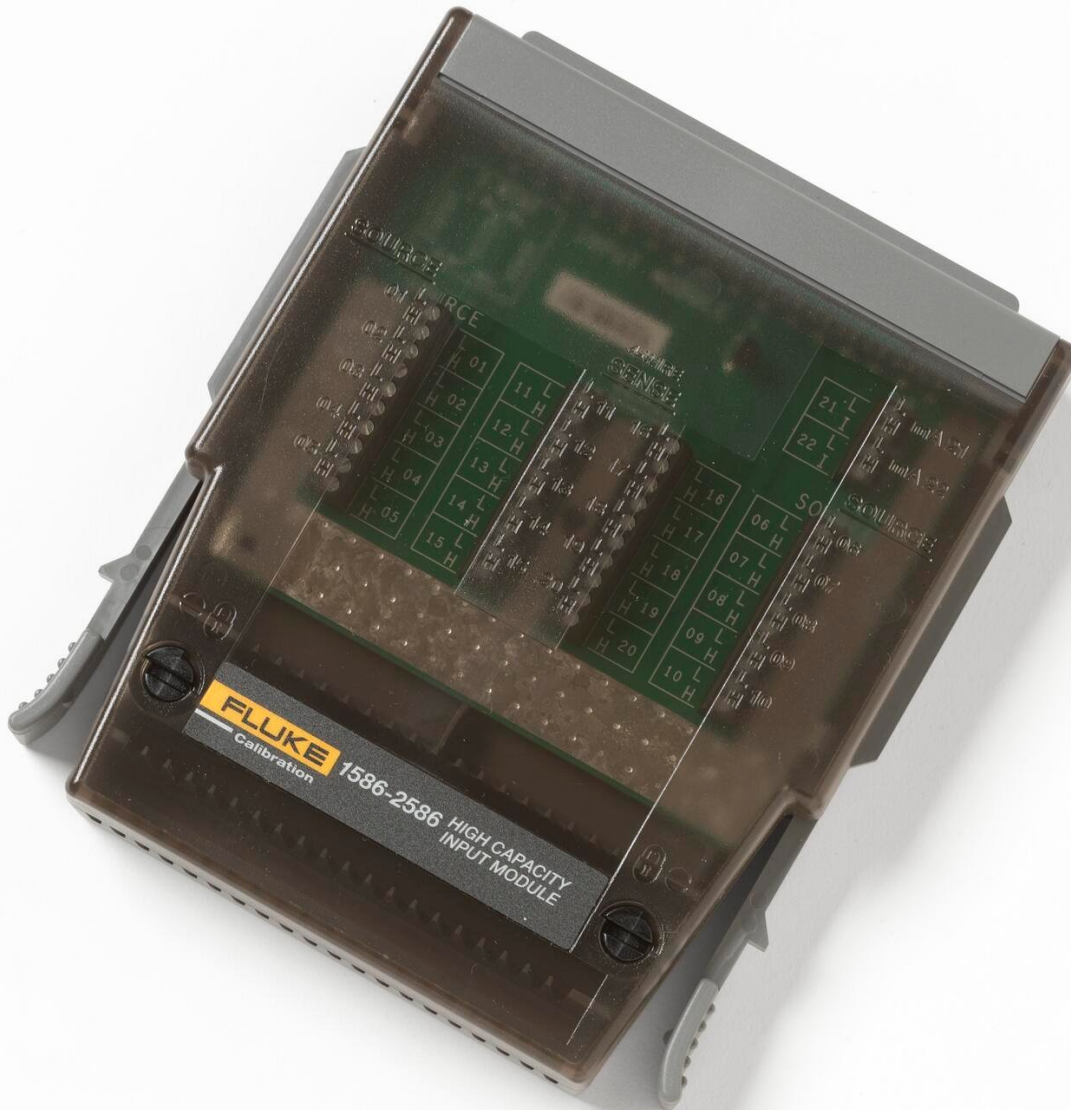

### Ikhtisar Produk: 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

If you want to configure the 1586A yourself to work with the 1586-2586 High-Capacity Module, you will need a relay card. However, if you already have a slot in the back panel of the 1586A configured for use with the 1586-2586, then you don't need another relay card. You can simply slide the 1586-2586 High-Capacity Module into the preconfigured slot and begin taking measurements. The 1586-2586 High-Capacity Module is designed with universal input channels



to measure temperature, resistance, dc voltage, and dc current for data acquisition applications where channel count and scan speed are important.

## Spesifikasi: 1586-2586/C | High-Capacity Module without Relay Card, Accredited Calibration

Specifications	
Maximum Input	50 V
Offset Voltage	<2 $\mu$ V
3-Wire Inteal Resistance Mismatch	<50 m $\Omega$
Basic CJC Accuracy	0.6 $^{\circ}$ C

## Model



### **1586-2586/C**

High-Capacity Module without Relay Card, Accredited Calibration

---

**Fluke.** *Memastikan aktivitas Anda terus berjalan dan beroperasi.*

**Fluke Corporation**

PO Box 9090, Everett, WA 98206 U.S.A.

**For more information call:**

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

[www.fluke.com](http://www.fluke.com)

**BUT. FLUKE SOUTH EAST ASIA PTE LTD**

Menera Satu Sentra Kelapa Gading #06-05

Jl. Bulevar Kelapa Gading Kav. LA# No. 1

Summarecon Kelapa Gading

Jakarta Utara 14240

Indonesia

Tel: +62 21 2938 5922

Email: [info.asean@fluke.com](mailto:info.asean@fluke.com)

[www.fluke.com/id](http://www.fluke.com/id)

©2025 Fluke Corporation. Specifications subject to change without notice.

04/2025

**Modification of this document is not permitted without written permission from Fluke Corporation.**