

Data teknis

Fluke 87V/E2 Industrial Electrician Combo Kit





Fitur utama

All functionality of the 87V Industrial Digital Multimeter, plus:

- Fully insulated 3 mm exposed metal test probes for electricians working in high energy environments
- C35 Soft Carrying Case holds meter, test leads and other accessories
- TPAK magnetic hanging strap lets you attach the meter to any ferrous surface, such as cabinets and iron pipes.

Ikhtisar Produk: Fluke 87V/E2 Industrial Electrician Combo Kit

Perangkat kombo baru ini didasarkan pada Fluke 87V dan menyertakan aksesori khusus untuk membuat pemecahan masalah industri lebih produktif. Menghemat lebih dari 15% dibandingkan dengan harga pembelian masing-masing aksesori.

Spesifikasi: Fluke 87V/E2 Industrial Electrician Combo Kit


Specifications		
Voltage DC	Maximum Voltage	1000 V
	Accuracy	$\pm(0.05\% + 1)$
	Maximum Resolution	10 μ V
Voltage AC	Maximum Voltage	1000 V
	Accuracy	$\pm(0.7\% + 2)$ True RMS
	AC Bandwidth	20 kHz with low pass filter; 3 db @ 1 kHz
	Maximum Resolution	0.1 mV
Current DC	Maximum Amps	10 A (20 A for 30 seconds maximum)
	Amps Accuracy	$\pm(0.2\% + 2)$
	Maximum Resolution	0.01 μ A
Current AC	Maximum Amps	10 A (20 A for 30 seconds maximum)
	Amps Accuracy	$\pm(1.0\% + 2)$ True RMS
	Maximum Resolution	0.1 μ A
Resistance	Maximum Resistance	50 M Ω
	Accuracy	$\pm(0.2\% + 1)$
	Maximum Resolution	0.1 Ω
Capacitance	Maximum Capacitance	9,999 μ F
	Accuracy	$\pm(1\% + 2)$
	Maximum Resolution	0.01 nF

Frequency	Maximum Frequency	200 kHz
	Accuracy	±(0.005% + 1)
	Maximum Resolution	0.01 Hz
Duty Cycle	Maximum Duty Cycle	99.9%
	Accuracy	±(0.2% per khz +0.1%)
	Maximum Resolution	0.1%
Temperature Measurement	-200.0°C - 1090°C -328.0°F - 1994.0°F excluding probe	
80 BK Temperature Probe	-40.0°C - 260°C -40.0°F - 500°F, 2.2°C or 2% whichever is greater	
Conductance	Maximum Conductance	60.00 nS
	Accuracy	±(1.0% + 10)
	Maximum Resolution	0.01 nS
Diode	Range	3 V
	Resolution	1 mV
	Accuracy	±(2% + 1)
Duty Cycle Range	Accuracy	Within ±(02% per kHz +0.1%)
Environmental Specifications		
Operating Temperature	-20°C to +55°C	
Storage Temperature	-40°C to +60°C	
Humidity (Without Condensation)	0% - 90% (0°C - 35°C) 0% - 70% (35°C - 55°C)	
Operating Altitude	2000 m	
Safety Specifications		
Overvoltage category	EN 61010-1 to 1000 V CAT III, 600V CAT IV	
Agency Approvals	UL, CSA, TÜV, VDE listed	
Mechanical and General Specifications		
Size	201 x 98 x 52 mm (with holster)	
Weight	355 g 624 g - with holster	
Display	Digital	6000 counts updates 4/sec. 19,999 counts in high-resolution mode
	Analog	32 segments, updates 40/sec.
	Frequency	19,999 counts, updates 3/sec at > 10 Hz
Warranty	Lifetime	
Baery Life	Alkaline	~400 hours typical, without backlight
Shock	1 Meter drop per IEC 61010-1:2001	



Vibration	Per MIL-PRF-28800 for a Class 2 instrument
-----------	--

Model

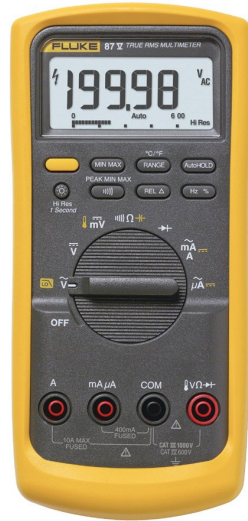

Fluke 87V/E2 Kit

Fluke 87V/E2 Industrial Electrician Combo Kit

Disertai:

- Multimeter 87V
- Kabel pengujian silikon TL224
- Jepit buaya jangkauan panjang AC220
- Pemindai pengujian TP238
- Kotak Gantungan Pengukur Magnetik TPAK ToolPak™
- Pemindai suhu 80BK
- Kotak aksesori lembut dan ringan C35
- Baterai 9 V (terpasang)
- Panduan Memulai
- CD dengan manual terperinci

Fluke. *Memastikan aktivitas Anda terus berjalan dan beroperasi.*

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853

In Europe/M-East/Africa

+31 (0)40 267 5100

In Canada (800)-36-FLUKE

From other countries +1 (425) 446-5500

www.fluke.com

BUT. FLUKE SOUTH EAST ASIA PTE LTD

Menera Satu Sentra Kelapa Gading #06-05

Jl. Bulevar Kelapa Gading Kav. LA# No. 1

Summarecon Kelapa Gading

Jakarta Utara 14240

Indonesia

Tel: +62 21 2938 5922

Email: info.asean@fluke.com

www.fluke.com/id

©2025 Fluke Corporation. Specifications subject to change without notice.

04/2025

Modification of this document is not permitted without written permission from Fluke Corporation.