


Technische gegevens

1586-2586 | High-Capacity Module without Relay Card

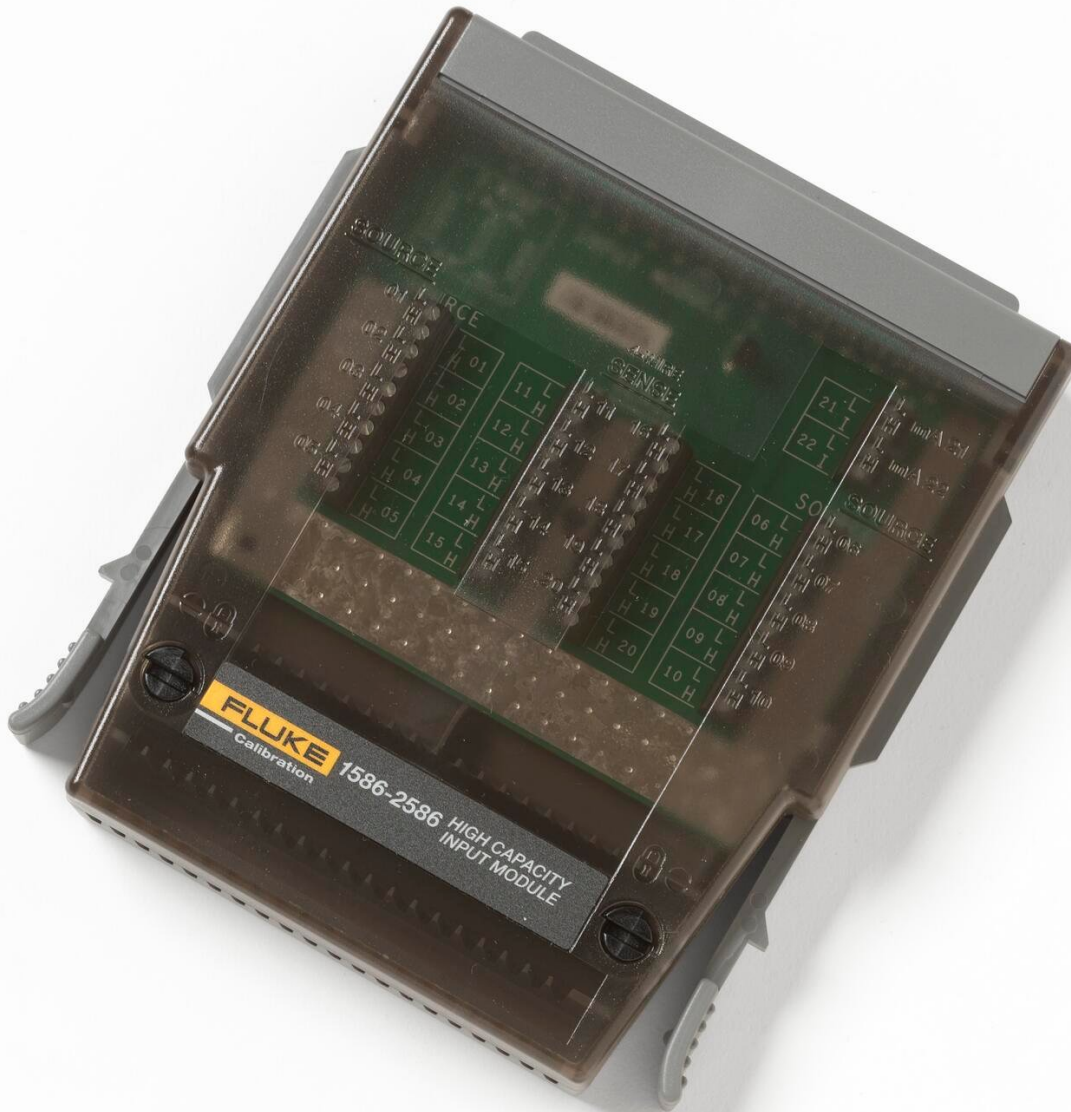

Productoverzicht: 1586-2586 | High-Capacity Module without Relay Card

If you want to configure the 1586A yourself to work with the 1586-2586 High-Capacity Module, you will need a relay card. However, if you already have a slot in the back panel of the 1586A configured for use with the 1586-2586, then you don't need another relay card. You can simply slide the 1586-2586 High-Capacity Module into the preconfigured slot and begin taking measurements. The 1586-2586 High-Capacity Module is designed with universal input channels



to measure temperature, resistance, dc voltage, and dc current for data acquisition applications where channel count and scan speed are important.

Specifications: 1586-2586 | High-Capacity Module without Relay Card

Specifications	
Maximum Input	50 V
Offset Voltage	<2 μ V
3-Wire Inteal Resistance Mismatch	<50 m Ω
Basic CJC Accuracy	0.6 $^{\circ}$ C

Modellen



1586-2586

High-Capacity Module without Relay Card

Fluke. *Keeping your world up and running.®*

Fluke Belgium N.V.
Kortrijksesteenweg 1095
B9051 Gent
Belgium
Tel: +32 2402 2100
E-mail: cs.be@fluke.com
www.fluke.be

©2025 Fluke Corporation. Alle rechten
voorbehouden.
Wijzigingen zonder voorafgaande kennisgeving
voorbehouden.
04/2025

**Wijziging van dit document is niet toegestaan
zonder schriftelijke toestemming van Fluke
Corporation.**