


## TECHNICAL DATA

# Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

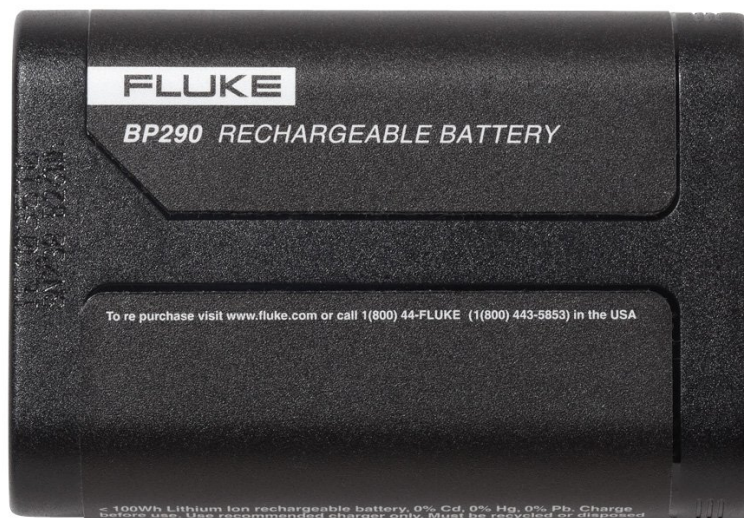

## Key features

- 2400 mAh rechargeable Li-ion battery
- Compatible with ScopeMeter® 190 Series III, 190 Series II, 120B Series, MDA-500 Series Motor Drive Analyzers and 430-II Series Power Quality Analyzers

## Product overview: Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

The Fluke BP290 Li-ion Battery is a standard capacity battery for use in Fluke 190 Series II and Series III ScopeMeter Test Tools, 120B Series ScopeMeter Test Tools, MDA-500 Series III Motor Drive Analyzers and 430-II Series Power Quality Analyzers. BP290 Li-ion batteries include a charge-status indicator so you can quickly and easily verify charge status in the field, and may be charged either in the instrument itself, or using the option [EBC290 External Charger](#). For situations requiring longer battery operating time consider the [Fluke BP291 4800 mAh High Capacity Li-Ion Battery](#).

## Specifications: Fluke BP290 2400 mAh High Capacity Li-Ion Battery for Fluke 190-Series-II

Baery	Li-ion, 10.8 V, 2500 mAh, 27 Wh configuration 3ICR19/66
Safety	Pollution degree 2
Operating temperature	0 °C to +50 °C (charging may slow or stop at environmental temperatures >40 °C)
Storage temperature	-20 °C to +60 °C
Recommended storage temperature	<35 °C
Humidity	0 °C to 10 °C noncondensing 10 °C to 30 °C @ 95 % (±5 % ) rh 30 °C to 40 °C @ 75 % (±5 % ) rh
Altitude	3000 m
Weight	175 g
Dimensions	22 mm x 85 mm x 59 mm

## Ordering information



## Fluke BP290

## 2400 mAh High Capacity Li-Ion Battery for Fluke 190-series II

**Fluke.** *Keeping your world up and running.®*

**Fluke (UK) Ltd.**  
52 Hurricane Way  
Norwich, Norfolk  
NR6 6JB  
United Kingdom  
Tel.: +44 (0)20 7942 0708  
E-mail: [cs.uk@fluke.com](mailto:cs.uk@fluke.com)  
[www.fluke.com/en-gb](http://www.fluke.com/en-gb)

©2025 Fluke Corporation. All rights reserved.  
Data subject to alteration without notice.  
03/2025

**Modification of this document is not permitted  
without written permission from Fluke  
Corporation.**