

TECHNICAL DATA

Fluke AC280 SureGrip[™] Hook Clips



Key features


- One pair of nickel-plated clips (red, black) with a profile narrowing to 5.6 mm at the tip and a hook opening of 6.4 mm at the front, reducing to 2 mm at the base
- Provides reliable and secure connections for precise electrical measurements
- Rated CAT II 1000 V, CAT III 1000 V, CAT IV 600 V, 3 A
- Recommended for use with TL222 and TL224 test leads

Product overview: Fluke AC280 SureGrip[™] Hook Clips

SureGrip[™] accessories are designed to improve steadiness in slippery hands. Rubber overmolded surfaces and fingerhugging curves give the user a comfortable, reliable grip on the accessory so they can focus on making an accurate measurement.



Ordering information

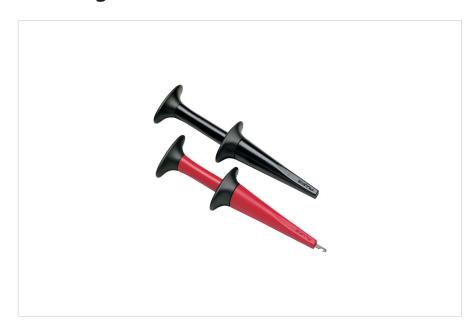

Fluke AC280

Fluke AC280 SureGripTM Hook Clips



Fluke. Keeping your world up and running.®

Fluke Corporation PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:

In the U.S.A. (800) 443-5853 In Canada (800) 36-FLUKE From other countries +1 (425) 446-5500 www.fluke.com ©2025 Fluke Corporation. Specifications subject to change without notice. 03/2025

Modification of this document is not permitted without written permission from Fluke Corporation.